


Karakteristikler

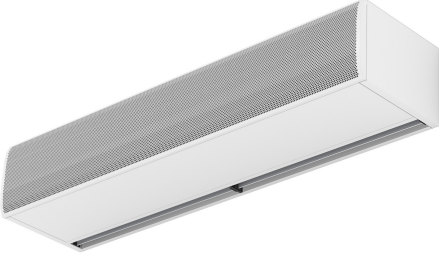

- So?uk depolar?n veya buzluklar?n i?ine monte edilmek i?in özel olarak tasarlanm??t?r.
- ?inko kaplama ?elik levhadan yap?lm?? kendini ta??yan kasa yap?s?, standart olarak yap?sal epoksi-polyester RAL9016 beyaz boyayla cilalan?r. Paslanmaz ?elik veya di?er renkler iste?e tabiidir.
- A??r? bak?m gerektirmeyen büyük fasetli hava giri?i ?zgaras?. Düz mikro-delikli hava giri?i ?zgaras? ile de mevcuttur, ?s?tma gerektirmeyen ticari kap?lar i?in daha zariftir.
- Anodize edilmi? alüminyum priz pervaneleri, kanat ?eklinde, iki tarafta da 0'dan 15°'e kadar ayarlanabilir.
- EC Çift giri?li santrifüj fanlar, d??tan rotorlu motor ve dü?ük gürültü seviyesi ile çok dü?ük tüketimi olan verimli fanlarla ?al??r.
- "A" tipi ?s?tmas?z, sadece hava ile.
- Advanced Plug&Play control. Includes: Advanced PRO control with LCD display and integrated thermostat, door contact, 10m and remote control. With integrated functions: door delay (configurable); interface mode; operation, alarm and maintenance warning signals; and multiple digital inputs that modify the air curtain's operation.
- Includes protective varnish for the electronic board and control.
- Optional:
 - Auxiliary temperature sensors that improve air curtain control and increase energy savings.
 - Clever PRO intelligent control (automatic, programmable, ModBus via PLC, timer, etc.) with an additional temperature sensor.
- Includes varnishing on the PCB to protect it from corrosion.

Ki?iselle?tirme

50Hz



Model	Is?nmam??	
	(m ³ /h)	(m)
KBB 1000 A	5-7	
KBB 1500 A	5-7	
KBB 2000 A	5-7	
KBB 2500 A	5-7	
KBB 3000 A	5-7	
KSB 1000 A	3,5-5	
KSB 1500 A	3,5-5	
KSB 2000 A	3,5-5	
KSB 2500 A	3,5-5	
KSB 3000 A	3,5-5	

60Hz

Model	Is?nmam??	
	(m ³ /h)	(m)
KSB 1000 A	3,5-5	
KSB 1500 A	3,5-5	
KSB 2000 A	3,5-5	
KSB 2500 A	3,5-5	
KSB 3000 A	3,5-5	


Boyutlar

View from the top / Vista superior

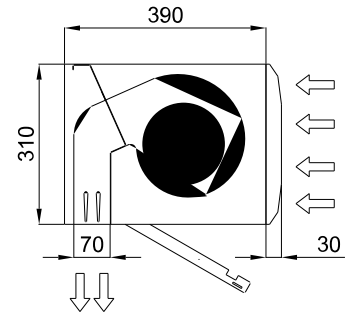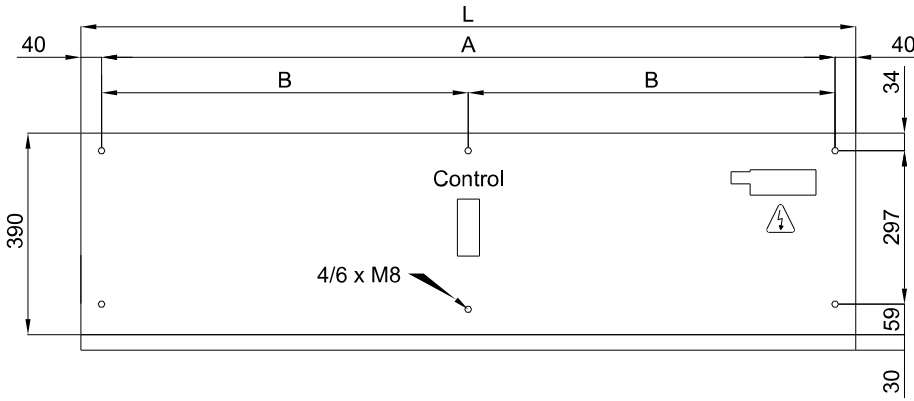

Lateral View / Vista Lateral

View from the bottom / Vista inferior

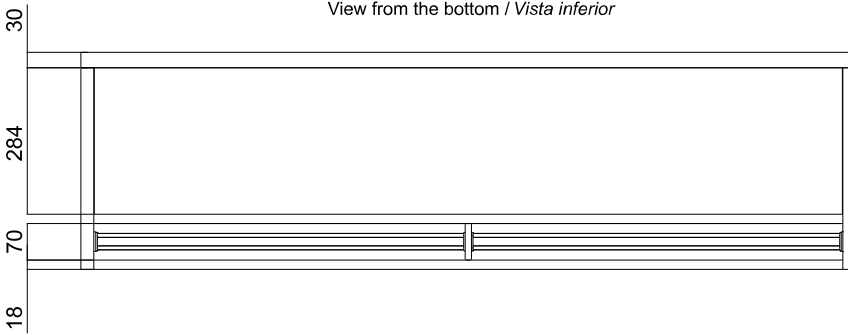

L	A	B
1000	920	-
1500	1420	710
2000	1920	960
2500	2420	1210
3000	2920	1460